


GCS Series

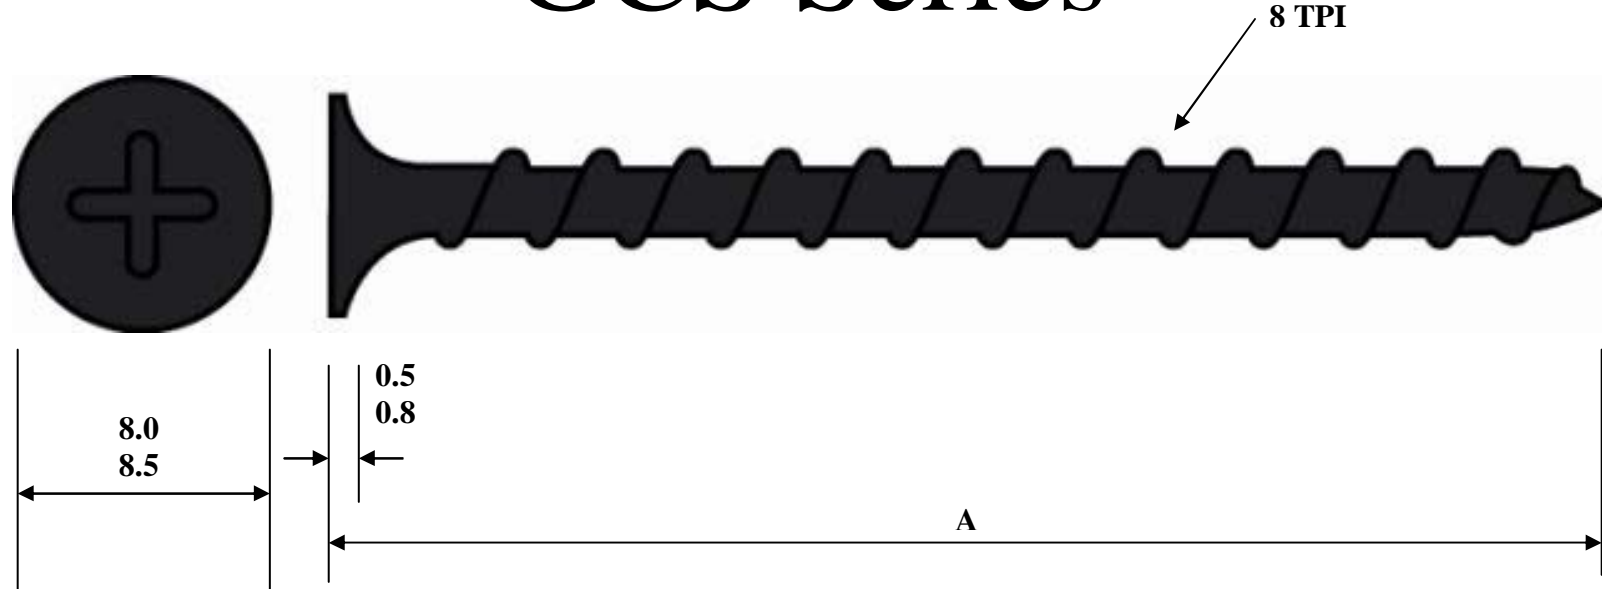

Drive Style	Head	Thread	Point	Material	Quantity	Application
#2 Phillips	Bugle	Coarse	Sharp	C-1022	1000	Drywall to Wood

Item #	A (mm)	Nominal Length	Shank	Finish
GCS6125	30.99 - 32.51	1 1/4"	6	Gray Phosphate
GCS6125B	30.99 - 32.51	1 1/4"	6	Gray Phosphate
GSC6162	40.39 - 43.16	1 5/8"	6	Gray Phosphate
GCS6162B	40.39 - 43.16	1 5/8"	6	Gray Phosphate
GCS6162D	40.39 - 43.16	1 5/8"	6	Exterior *
GCS7200	49.8 - 51.8	2"	7	Gray Phosphate

Specs	
Withdrawal (lbf) ¹	444.24
Lap Shear (lbf) ²	129.9
Drill speed (sec) ²	0.33
Max Torque (inlb) ²	20.11
Pull Through (lbf) ³	115.56
Screw Shear (lbf)	788.71

¹ SPF

² 1/2" drywall into SPF

³ 1 piece 1/2" drywall

THIS FASTENER MEETS THE FOLLOWING NATIONAL AND INTERNATIONAL SPECIFICATIONS

* ASTM B633 SC3 Corrosion Resistance	* ASTM A641 Type 1 Galvanization	ANSI/ASME B18.6.1	ASTM C 1002
---	-------------------------------------	-------------------	-------------