


GFD Series

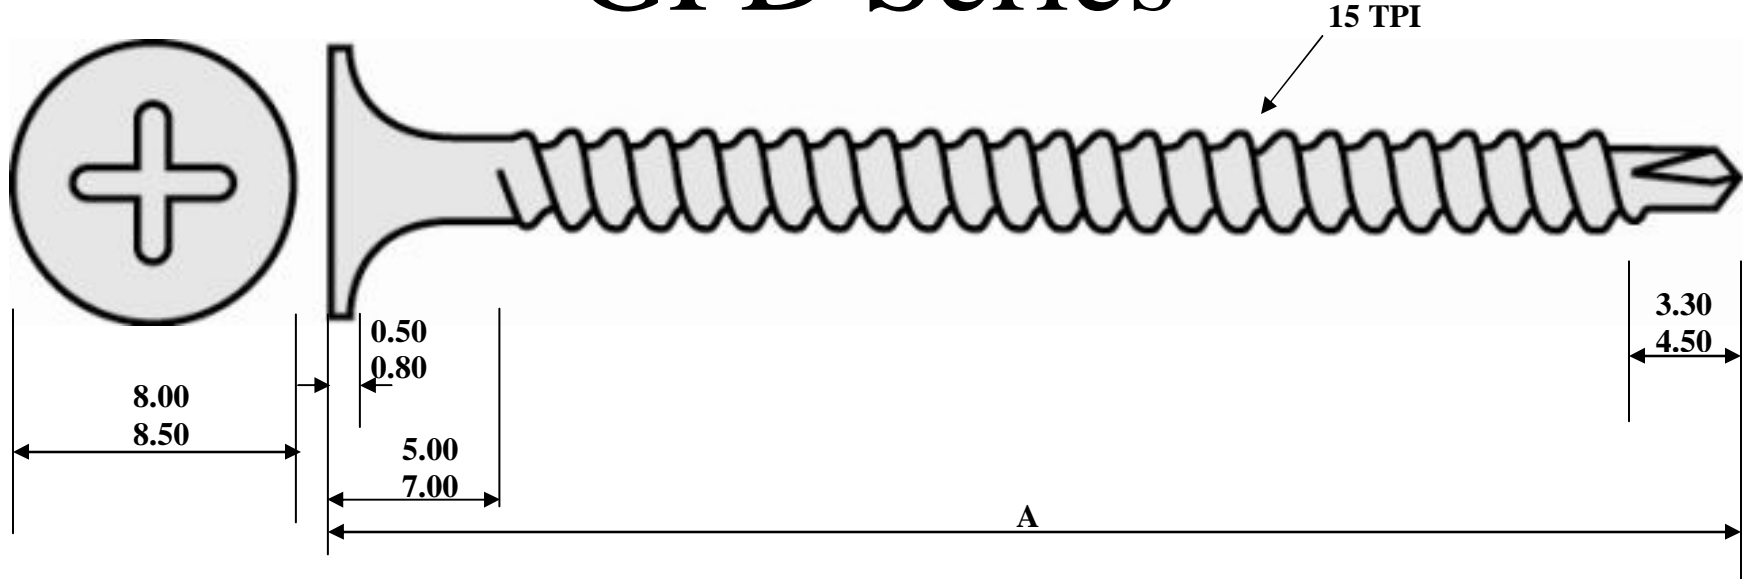

Shank	Drive Style	Head	Thread	Point	Material	Application
6	#2 Phillips	Bugle	Fine	Drill	C1022	Drywall to Heavy Gauge Steel

Specs	6125	6200
Withdrawal (lbf)¹	377	
Lap Shear (lbf)²	128.22	128.22
Drill Speed (sec)³	1.90	1.90
Max Torque (inlb.)⁴	11.27	11.27
Pull Through (lbf)	108.80 ⁵	148.31 ⁶
Ultimate Shear (lbf)	1039.3	1039.3
Torsion Strength (inlb)	37.2	37.2

Item #	A (mm)	Quantity	Nominal Length	Finish
GFD6125	30.99 – 32.51	1000	1 1/4"	Clear Zinc
GFD6125B	30.99 – 32.51	4000	1 1/4"	Clear Zinc
GFD6125BP	30.99 – 32.51	4000	1 1/4"	Gray Phosphate
GFD6125DK	30.99 – 32.51	1000	1 1/4"	Exterior *
GFD6162	40.39 – 42.16	1000	1 5/8"	Clear Zinc
GFD6162B	40.39 – 42.16	4000	1 5/8"	Clear Zinc
GFD6162DK	40.39 – 42.16	1000	1 5/8"	Exterior *
GFD6200	50.04 – 51.56	1000	2"	Clear Zinc

¹ 18 ga (.0478 in.) steel
² 1/2" drywall over 16 ga (0.0565 in.) steel (drywall failure)
³ 1/2" drywall over 16 ga (0.0565 in.) steel; 2500 RPM; 40 lbs
⁴ 18 ga (.0478 in.) steel; 1200 RPM
⁵ 1 piece 1/2" drywall
⁶ 2 pieces 1/2" drywall

THIS FASTENER MEETS THE FOLLOWING NATIONAL AND INTERNATIONAL SPECIFICATIONS

ASTM C 954	*ASTM B633 SC3 Corrosion Resistance	*ASTM A641 Type 1 Galvanization
------------	---	---------------------------------------