


GFS Series

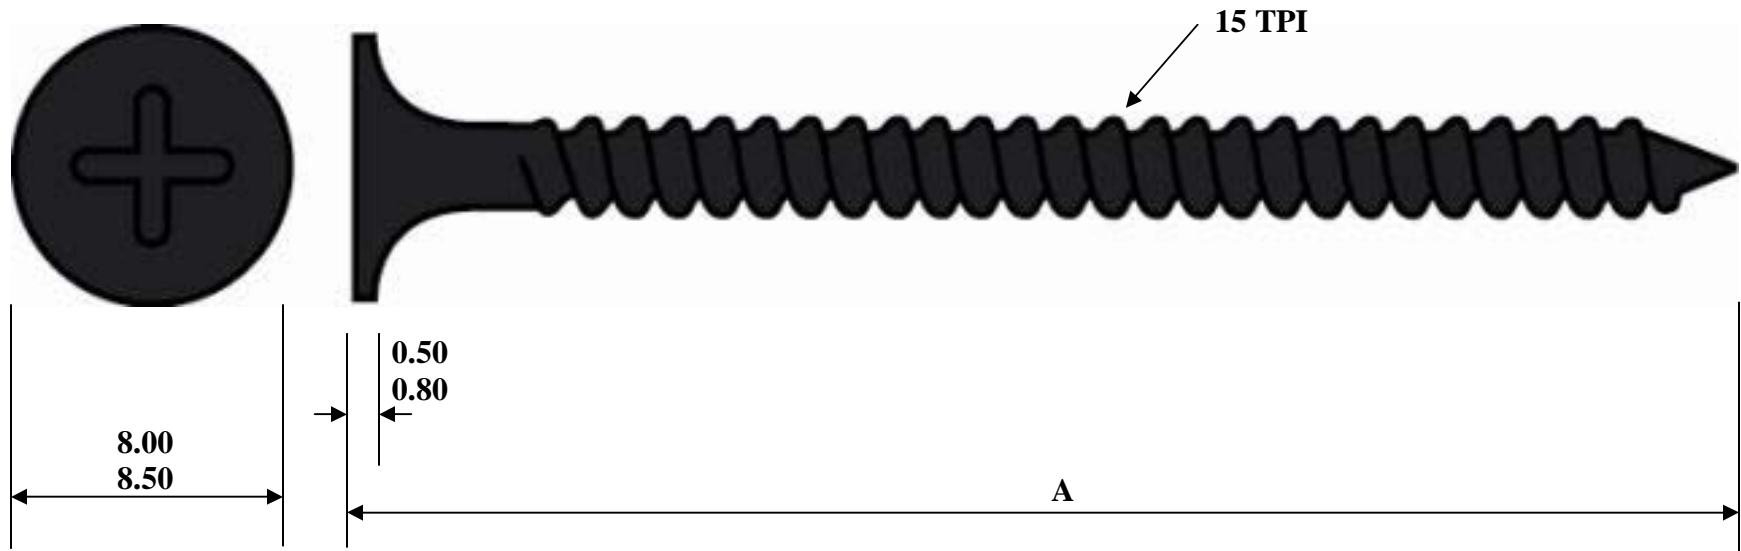

| Shank | Drive Style | Head | Thread | Point | Finish | Material | Application |
|-------|-------------|-------|--------|-------|----------------|----------|------------------------------|
| 6 | #2 Phillips | Bugle | Double | Sharp | Gray Phosphate | | Drywall to Light Gauge Steel |

| Item # | A (mm) | Nominal Length | Quantity |
|----------|---------------|----------------|----------|
| GFS6100B | 24.00 – 26.00 | 1" | 4000 |
| GFS6125 | 30.99 – 32.51 | 1 1/4" | 1000 |
| GFS6125B | 30.99 – 32.51 | 1 1/4" | 4000 |
| GFS6162 | 40.39 – 42.16 | 1 5/8" | 1000 |
| GFS6162B | 40.39 – 42.16 | 1 5/8" | 4000 |

| Specs | |
|---------------------------------|--------|
| Withdrawal (lbf) ¹ | 271.07 |
| Lap Shear (lbf) ² | 131.4 |
| Max Torque (inlb) ² | 11.4 |
| Pull Through (lbf) ³ | 111.83 |
| Ultimate Shear (lbf) | 869.7 |
| Torsion Strength (inlb) | 40.6 |

THIS FASTENER MEETS THE FOLLOWING NATIONAL AND INTERNATIONAL SPECIFICATIONS

ASTM C 1002

¹ 20 gauge (0.0359 in.) steel
² 1/2" drywall over 22 gauge (0.029 in.) steel; drive torque at 1200 RPM

³ 1 piece 1/2" drywall